



# INSTALLATION INSTRUCTIONS

## Components List:


- BM-TWP Ball Check Valve Jets
- MANI-SD-A Security Device
- MAN-A-4-AC Manifold
- Silver SLS+ Variable Speed Blower

Install blower behind a wall (with an access panel) or in a closet. Blower can also be installed under floor. Ensure the Security device, MANI-SD-A, is at least 2" above the bottom of overflow hole. Security device and hose can be mounted in wall.

# Giana

## Acrylic Slipper Air Bath Tub With Overflow

**Installation shown is typical.**

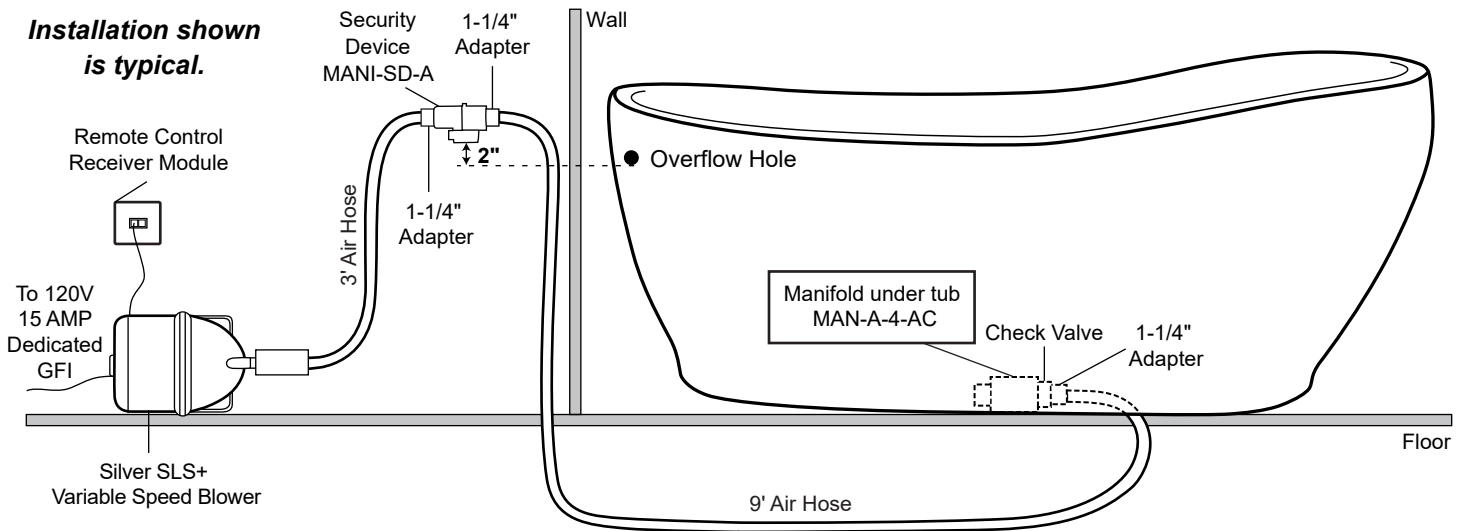

### INSIDE OF BATH TUB

## Features:

- (12) Maxi Air Jets with 24 openings




Elbows for air jets    Tees for air jets

- Remote Control CG+/RTC-SENSOR-WP



12-15 year battery life

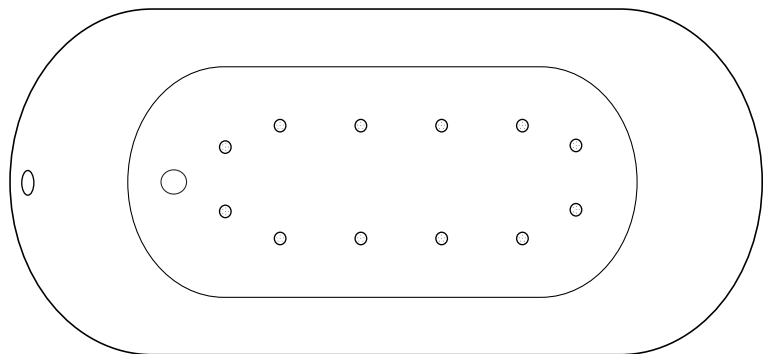



## SPECIFICATIONS

Overall Dimensions	66-1/2" L x 28-1/2" W (front to back) x 25"-29" H
Water Capacity	
without overflow	70 gallons
with overflow	59 gallons
Water Depth	
to top of tub	19" H
to overflow	16-1/4" H
Tub Weight Uncrated	200 lbs.
Tub Rim	N/A
Faucet Configurations	No Drillings
Tub Footprint	50-1/4" L x 24" W (front to back)

# 67" Giana

Acrylic Slipper  
Air Bath Tub

*All measurements are approximate. Measurements may vary +/- 1/2".*

