



INSTALLATION INSTRUCTIONS

Components List:


- BM-TWP Ball Check Valve Jets
- MANI-SD-A Security Device
- MAN-A-4-AC Manifold
- Silver SLS+ Variable Speed Blower

Install blower behind a wall (with an access panel) or in a closet. Blower can also be installed under floor. Ensure the Security device, MANI-SD-A, is at least 2" above the bottom of overflow hole. Security device and hose can be mounted in wall.

Raksha

Stainless Steel Japanese Soaking Air Tub - With Overflow

Installation shown is typical.

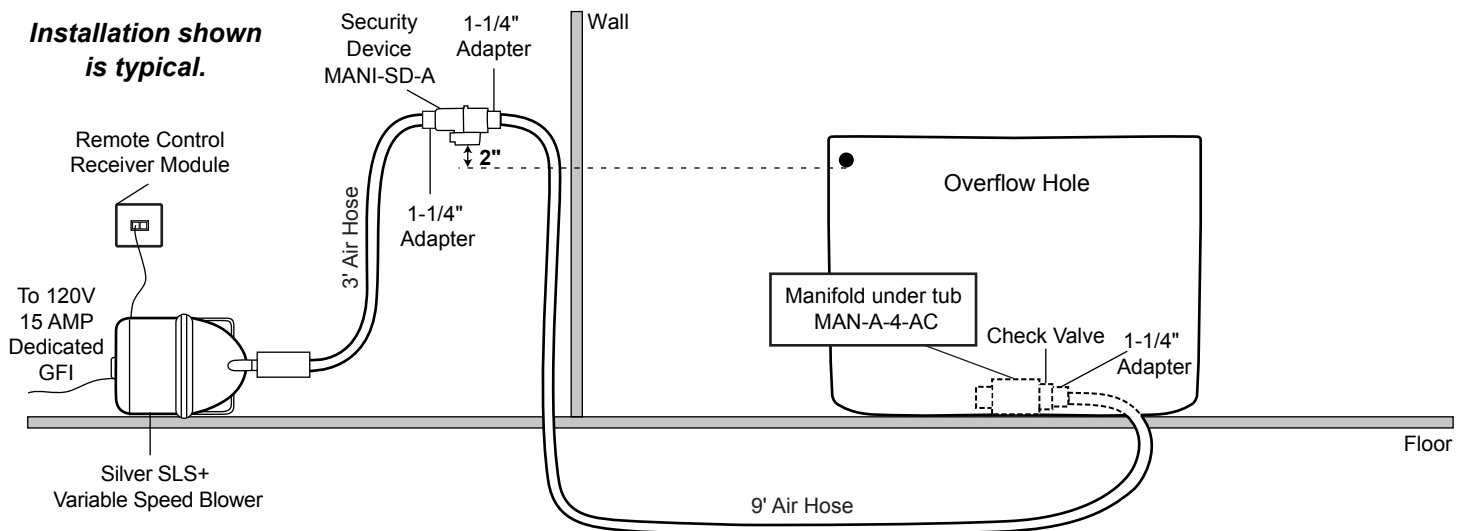

INSIDE OF BATH TUB

Features:

- (12) Maxi Air Jets with 24 openings




Elbows for air jets Tees for air jets

- Remote Control CG+/RTC-SENSOR-WP



12-15 year battery life

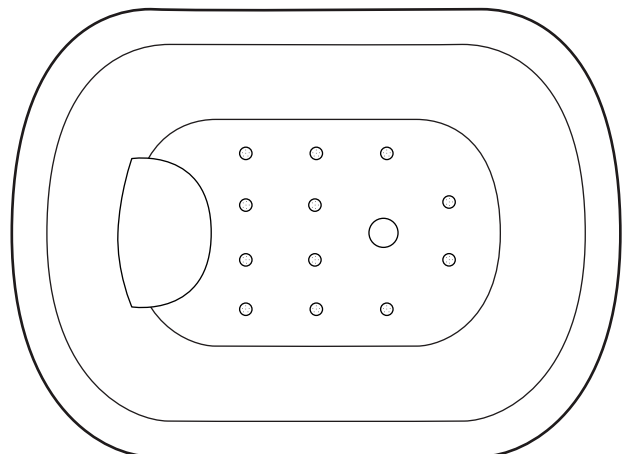



INSTALLATION INSTRUCTIONS

Components List:


- BM-TWP Ball Check Valve Jets
- MANI-SD-A Security Device
- MAN-A-4-AC Manifold
- Silver SLS+ Variable Speed Blower

Install blower behind a wall (with an access panel) or in a closet. Blower can also be installed under floor. Ensure the Security device, MANI-SD-A, is at least 2" above the tub rim. Security device and hose can be mounted in wall.

Raksha

Stainless Steel Japanese Soaking Air Tub - Without Overflow

Installation shown is typical.

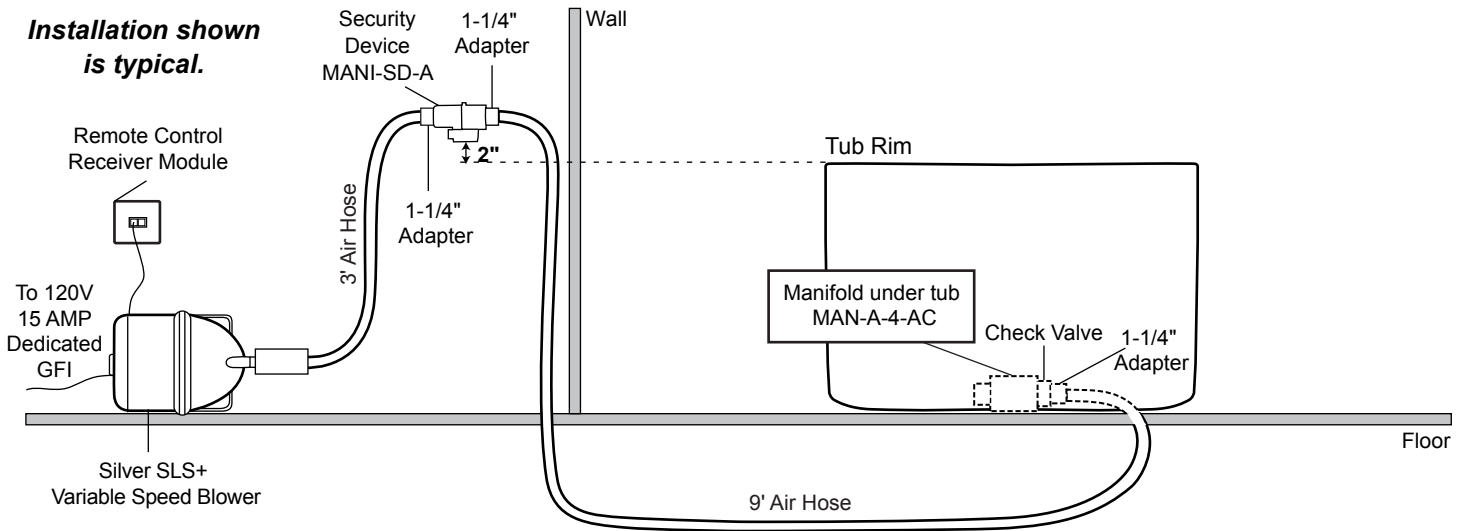

INSIDE OF BATH TUB

Features:

- (12) Maxi Air Jets with 24 openings




Elbows for air jets Tees for air jets

- Remote Control CG+/RTC-SENSOR-WP



12-15 year battery life

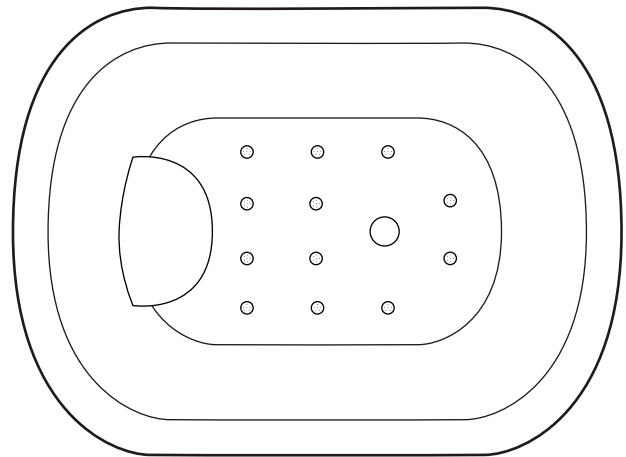



SPECIFICATIONS

Overall Dimensions	48" L x 33-1/2" W (front to back) x 34" H
Water Capacity	
without overflow	133 gallons
with overflow	120 gallons
Water Depth	
to top of tub	29-1/4" H
to overflow	26-1/2" H
Tub Weight Uncrated	242 lbs.
Tub Rim	3" wide
Faucet Configurations	No Drillings

48" Raksha

Stainless Steel Japanese Soaking Air Tub

All measurements are approximate. Measurements may vary +/- 1/2".

