



SCONCE INSTALLATION INSTRUCTIONS

BEFORE YOU BEGIN

We recommend consulting a professional if you are unfamiliar with installing lighting fixtures. Signature Hardware accepts no liability for any damage caused, or for personal injury, during installation. Hardwired lighting fixtures should be installed by a licensed electrician and must be in accordance with local and National Electrical Code (N.E.C) standards.

Observe all local plumbing and building codes.

Unpack and inspect the lighting fixture for shipping damage. If any damage is found, contact our Customer Relations team at 1-866-855-2284.

GETTING STARTED

- Ensure that you have gathered all the required materials that are needed for the installation.
- Before performing any electrical work, ensure that the main power source is shut off to avoid electric shock.

TOOLS AND MATERIALS:



Phillips
Screwdriver



Step Ladder



Wire Cutters



Flathead
Screwdriver




Safety Glasses




SCONCE INSTALLATION INSTRUCTIONS

INSTALLATION


1. Fasten the crossbar to the outlet box using the mounting screws.

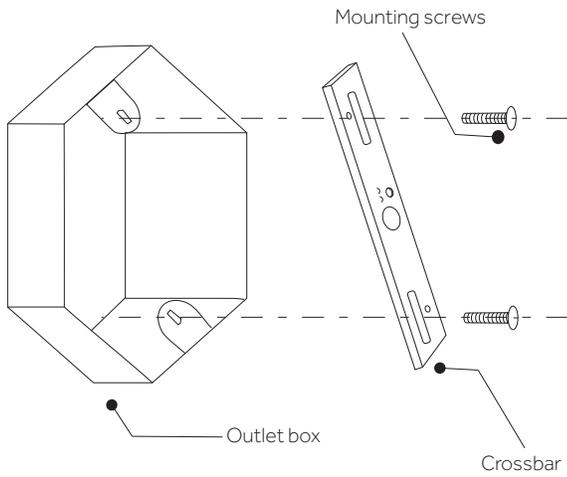


2. Take out the ground wire and outlet wires from the outlet box to prepare to make connections from light to power source.

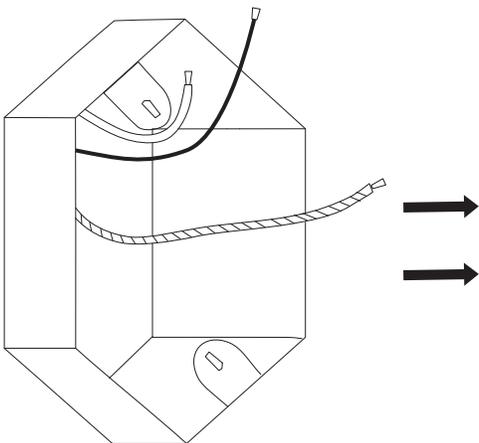

3. If you are not provided a fixture ground wire, tightly wrap the outlet ground wire around the green grounding screw. If you are, attach the fixture ground wire to the outlet ground wire in the same manner, as shown in step 4 and 5.

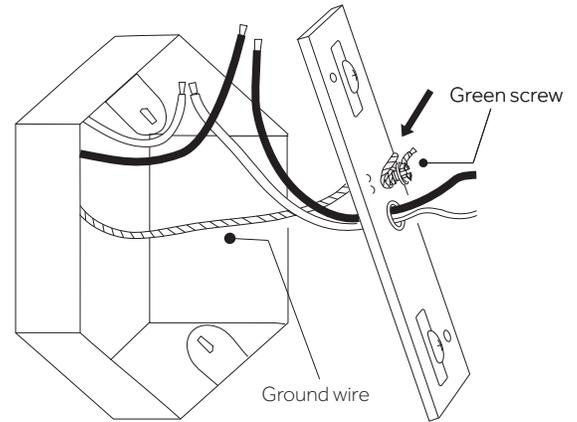


4. Attach the black supply wire to the black fixture lead wire by using the wire connector.

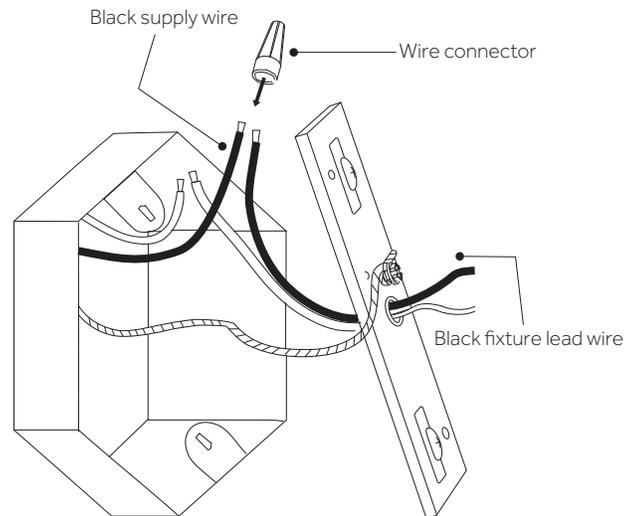




SCONCE INSTALLATION INSTRUCTIONS


5. Attach the white supply wire to the white fixture lead wire by using the wire connector.

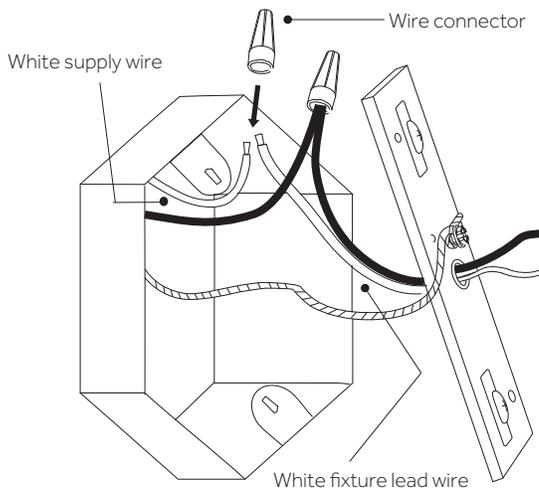

6. Adjust the backplate to line up evenly with the outlet box. Then, fasten to the crossbar with flathead screws.

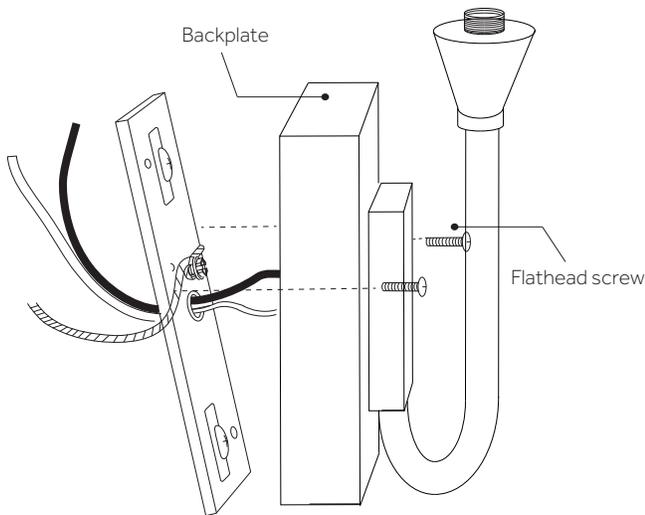

7. Position the glass shade onto the socket and fasten with the socket ring.

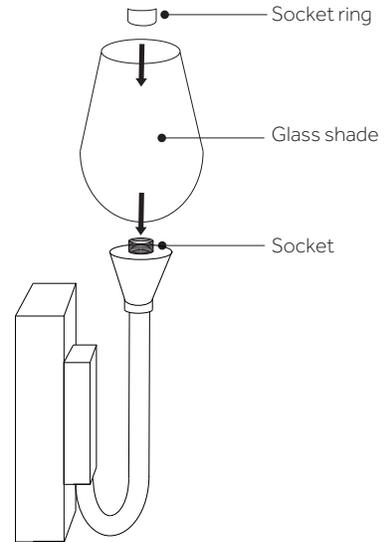

8. Finish the installation by screwing the light bulb into the socket.

